


# Bosses

## SK-N-1 and SK-N-2

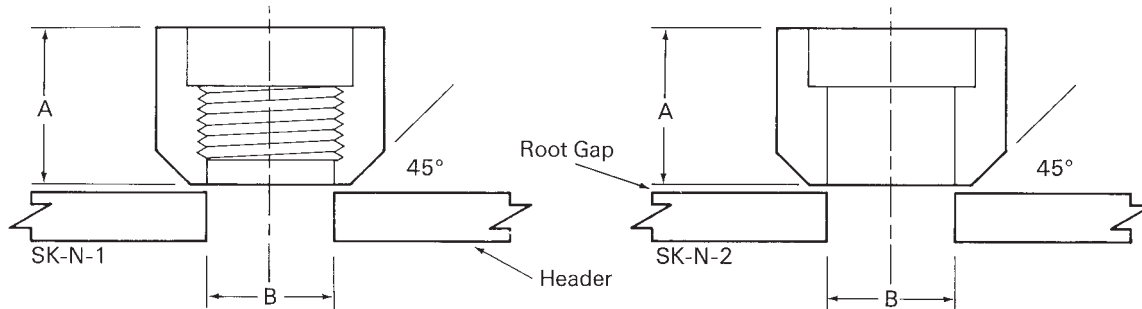

- A weld-on connection which provides a self-reinforced, one piece connection.
- Circular design allows use of automatic burning equipment.
- Requires less weld material while restoring 100% pipe or header strength.
- Bosses provide a contoured internal joint with a gradual transition from header to branch allowing full penetration welds while reducing installation cost over tees or other nozzle connections.
- Stocked in NPS sizes 1/4" through 2" with other sizes available as required.

### SK-N-1

A Socket-Welding and Threaded Combination For Use When Hydrotesting is Required

Classes 3000 and 6000

Outlet Nominal Pipe Size	A	B	Weight	
			3000	6000
1/2	1 1/2	23/32	.20	.40
3/4	2	15/16	.30	.50
1	2	1 5/32	.50	.90
1	2	1 1/2	.90	1.3
1 1/2	2	1 3/4	1.2	2.0
2	2 1/2	2	1.8	2.8

### SK-N-2

For Use When A Socket-Welding Outlet End is Required

Classes 3000 and 6000

Outlet Nominal Pipe Size	A	B	Weight	
			3000	6000
1/2	1 1/2		.20	.40
3/4	2	Branch	.30	.50
1	2	Pipe	.50	.90
1	2	ID	.90	1.3
1 1/2	2		1.2	2.0
2	2 1/2		1.8	2.8

Dimensions are in inches. Weights are in pounds.