


# Stainless Steel Rod & Bar

## HRAP Structural Channel

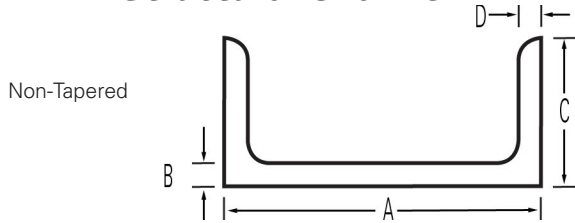


- Specifications: ASTM A 276
- Stocked in 20-22 FT random lengths

| Size (A) | Web (B) | Flange (C) | Thickness (D) | Lbs/Ft | Lbs/Length** | T304/L Part Number | T316L Part Number |
|----------|---------|------------|---------------|--------|--------------|--------------------|-------------------|
| 40 mm    | 3 mm    | 20 mm      | 3 mm          | 1.20   | 26.40        | 651233             |                   |
| 1 1/2    | .125    | .750       | .750          | 1.17   | 25.74        | 650732             |                   |
| 2        | .125    | 1.000      | .125          | 1.59   | 35.98        | 633926             | 667690            |
| 2        | .1875   | 1.000      | .1875         | 2.32   | 51.04        | 640371             |                   |
| 2        | .250    | 1.000      | .250          | 2.88   | 63.36        | 632938             | 659435            |
| 3        | .1875   | 1.375      | .1875         | 3.55   | 78.10        | 665614             | 671673            |
| 3        | .1875   | 1.500      | .1875         | 3.70   | 81.40        | 665622             |                   |
| 3        | .250    | 1.500      | .250          | 4.78   | 105.16       | 507379             | 653609            |
| 4        | .250    | 1.750      | .250          | 6.05   | 133.10       | 646050             | 653617            |
| 4        | .250    | 2.000      | .250          | 6.55   | 144.10       | 507387             | 653625            |
| 6        | .250    | 3.000      | .250          | 10.00  | 220.00       | 632899             | 653659            |
| 6        | .375    | 3.000      | .375          | 14.50  | 319.00       | 632904             | 653667            |
| 8        | .220    | 2.260      | .390          | 11.50  | 253.00       | 647535*            | 653722*           |
| 8        | .250    | 4.000      | .250          | 13.70  | 301.40       | 633463*            | 653714*           |
| 8        | .375    | 4.000      | .375          | 19.70  | 433.40       | 659118             | 659126            |
| 8        | .487    | 2.520      | .390          | 18.75  | 412.50       | 647543*            | 653730*           |
| 10       | .240    | 2.600      | .436          | 15.30  | 336.60       | 634231*            | 656542*           |
| 10       | .379    | 2.739      | .436          | 20.00  | 440.00       | 652019*            | 656550*           |
| 12       | .282    | 2.942      | .501          | 20.70  | 455.40       | 636356*            |                   |
| 12       | .387    | 3.047      | .501          | 25.00  | 550.00       | 672663             | 672661            |
| 12       | .510    | 3.170      | .501          | 30.00  | 660.00       | 672726             | 672734            |
| 15       | .400    | 3.400      | .650          | 33.90  | 745.80       | 644375*            | 670211*           |

\*Laser Fused

Some of the above non-tapered sizes may be available in tapered form if required.

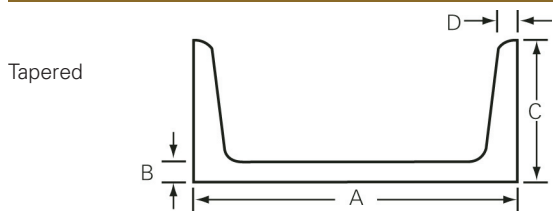

| Size (A) | Web (B) | Flange (C) | Thickness (D) | Lbs/Ft | Lbs/Length** | T304/L Part Number | T316L Part Number |
|----------|---------|------------|---------------|--------|--------------|--------------------|-------------------|
| 3        | .170    | 1.410      | .273          | 4.10   | 90.20        | 650172             | 653586            |
| 4        | .184    | 1.584      | .296          | 5.40   | 118.80       | 647470             | 653594            |
| 4        | .296    | 1.721      | .321          | 7.25   | 159.50       | 652459             | 656209            |
| 5        | .190    | 1.750      | .320          | 6.70   | 147.40       | 632881             | 653633            |
| 5        | .325    | 1.885      | .320          | 9.00   | 198.00       | 632912             | 653641            |
| 6        | .200    | 1.900      | .343          | 8.20   | 180.40       | 617394             | 653675            |
| 6        | .314    | 2.034      | .343          | 10.50  | 231.00       | 632873             | 653683            |

\*\* Weight based on 22 FT lengths

Dimensions are in inches. All weights are approximate. Sizes not shown may be available upon request.